

Customer

Technical data


High-pressure multistage centrifugal pump Helix FIRST V 3607/2-5/25/E/KS/400-5

Project name Untitled project 2023

Project ID
Installation location
Customer pos.no

Date 15.06.2023

Duty chart

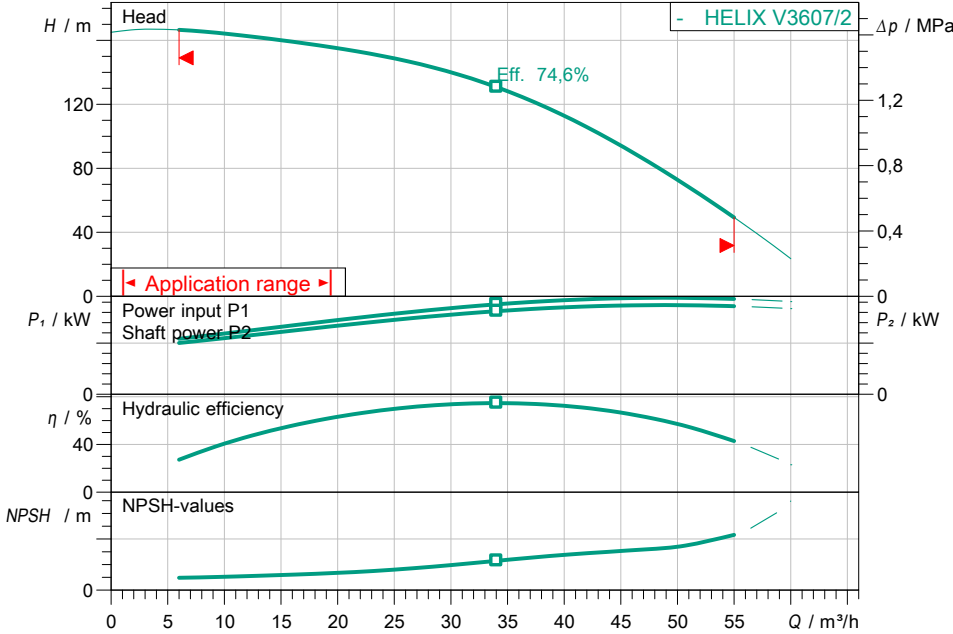

Requested data

Flow
Head
Media Water 100 %
Fluid temperature 20,00 °C
Density 998,30 kg/m³
Kin. viscosity 1,00 mm²/s

Hydraulic data (Duty point)

Flow
Head
Shaft power P2
Hydraulic efficiency
NPSH

Product data

High-pressure multistage centrifugal pump
Helix FIRST V 3607/2-5/25/E/KS/400-5
Max. operating pressure 2,5 MPa
Inlet pressure max. 10 bar
Fluid temperature -20 °C ... +120 °C
Max. ambient temperature 50 °C
Minimum efficiency index (MEI) ≥ 0.7

Motordata per Motor/Pump

Motor efficiency level IE3
Mains connection 3~ 400 V / 50 Hz
Permitted voltage tolerance +-10 %
Max. speed 2900 1/min
Rated power P2 18,50 kW
Rated current 32,80 A
Power factor 0,89
Efficiency 50% / 75% / 100% 91,6/92,5/92,4%
Degree of protection IP55
Insulation class F
Motor protection no

Fitting dimensions

Pipe connection on the suction side DN 65, PN 25
Pipe connection on the pressure side DN 65, PN 25

Materials

Pump housing 5.1301/EN-GJL-250
Impeller 1.4307
Shaft 1.4057
Shaft seal BQ7EGG
Gasket material EPDM

Information for order placements

Weight approx. 187 kg
Item number 4200593

ISO 9906: 2012 3B

Dimensions

H 1498
H2 1018
ØM 305
X 218

mm

