




Customer _____ Project _____
 Customer no. _____ Project no. _____
 Contact _____ Position no. _____
 Care of _____ Location _____
 Date 2023-05-06

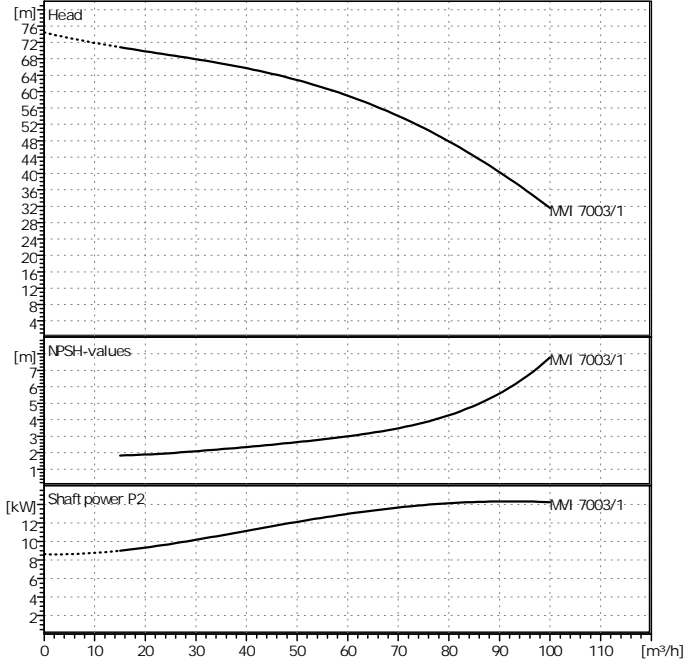

Requested data

Flow	0	m³/h
Head	0	m
Fluid	Water, pure	
Fluid temperature	20	°C
Density	0.9983	kg/dm³
Kinematic viscosity	1.005	mm²/s
Vapor pressure	0.02337	bar

Pump data

Make	WILO	
Type	MVI 7003/1 PN16 3~	
Pumpe type	Single head pump	
Pressure rating	PN 16	
Min. fluid temperature	-15	°C
Max. fluid temperature	120	°C

Hydraulic data (duty point)

Flow		m³/h
Head		m
Speed	2950	1/min
Shaft power P2		kW
NPSH		m

Materials / Shaft seal

Pump base	EN-GJL 250 KTL beschichtet/covered
Impellers	1.4401
Stage chambers	1.4404
Pressure casing	1.4301
Shaft	1.4404
Seals	EPDM
Mechanical seal	Wolfram carbide/graphit

Dimensions per pump

		mm					
H	1318						
h2	842						
M	325						
X	208						
K	19						

Suction side	DN100 / PN 16
Discharge side	DN100 / PN 16
Weight	172 kg

Motordata per Motor/Pump/

Rated power P2	15	kW
Nominal speed	2950	1/min
Rated voltage	3~400 V, 50 Hz	
Max. current	26.5	A
Degree of protection	IP 55	
Permitted voltage tolerance	+/- 10%	

Item no. of standard version 4071171

